

# CENTRIFUGAL JUICER





Internationally patented models









# For a high quality juice

The juice extractor #50 makes any kind of fruit and vegetable juices: apple, carrot, ginger, beetroot, cucumber...

nutritional benefits from the

food stores...







- 1 Pusher: low effort, constant
- 2 Extra wide feeding chute Ø 79.5mm
- 3 Locking system: electric cut off and motor braking when opening the handle
- 4 Filter basket: very fine sieve (0.5mm / 0.02" holes)

- 5 High spout: 200mm. Accepts jugs and blender jars
- 6 Ezy-clean™ system: removable bowl, basket, cover (no tool needed)
- 7 Pulp container: 7.51 (2 gallons)
- 8 Powerful and quiet asynchronous motor

# Worldwide leader in commercial juicers

Santos has a 30 years' experience in manufacturing commercial juicers and developing exclusive patented systems to provide the best reliability and efficiency.





# **Perfect filtration** 3 filter baskets available

Standard - 0,5mm holes

delivered with the juicer (ref 50200)

Option - 0,8mm holes

for fibrous ingredients ex: pineapple, ginger (ref 50200B)

Option - Auto-clean for intensive use: less cleaning, more yield (réf 50200C).



# **Commercial quality**

Powerful and silent asynchronous

motor.

High output: 100l/h.

Quiet: 65 dBA. Can be used in front

of customers.

Large basket: reducing cleaning.

### Easy to use

XL feeding chute: fits whole apples. Continuous juice production,

automatic pulp ejection.

Ezy-clean™ system: removable bowl,

basket and covers.

# Safety, standards, hygiene

In accordance with the following regulations	Machinery directive 2006 / 42 / EC
	Electromagnetic compatibility 2014 / 30 / EU
	"Low voltage" directive 2014 / 35 / EU
	RoHS directive 2011 / 65 / EU
	Regulation 1935 / 2004 / EC (contact with food)
	Regulation 10 / 2011 / EU (Plastic in contact with food)
Harmonized European Standards	EN ISO 12100 : 2010
	EN 60204-1 + A1: 2009
	EN 60335-2-64 :2004 Commercial electric kitchen machines
	EN 12547:2014 Juice extractors
	CE Marking, UL (USA) and cUL (Canada), NSF (USA), KC (Korea)
Thermal safety	Motor protected by internal thermal detector and overload protector
Electrical safety	On/Off swicth detects overloading and no voltage
	All mechanical parts are ground connected
	Appliances are 100% tested after assembly
Acoustic safety	Silent asynchronous motor
Mecanical safety	A friction brake immediately stops the basket when opening the handle.
Hygiene	All removable parts can be put in a dishwasher or easily cleaned with hot soapy water
	1 /

### PRODUCT: 2-YEAR WARRANTY | MOTOR: 5-YEAR

# **Technical** specifications

### Motor

Single phase:

220-240 V - 50 / 60 HzV - 800W CE, KC 100 - 120 V - 50 / 60 Hz - 800W CE,

UL, NSF

Speed:

3 000 rpm (50Hz) 3 600 rpm (560Hz)





### Appliance

W: 260 mm (10") D: 470 mm (19") H: 450 mm (18")


D: 500 mm (20") H: 570 mm (22")

W: 315 mm (12")

Weight: Weight: 14,5 Kg (31lbs)

16,3 Kg (35lbs)



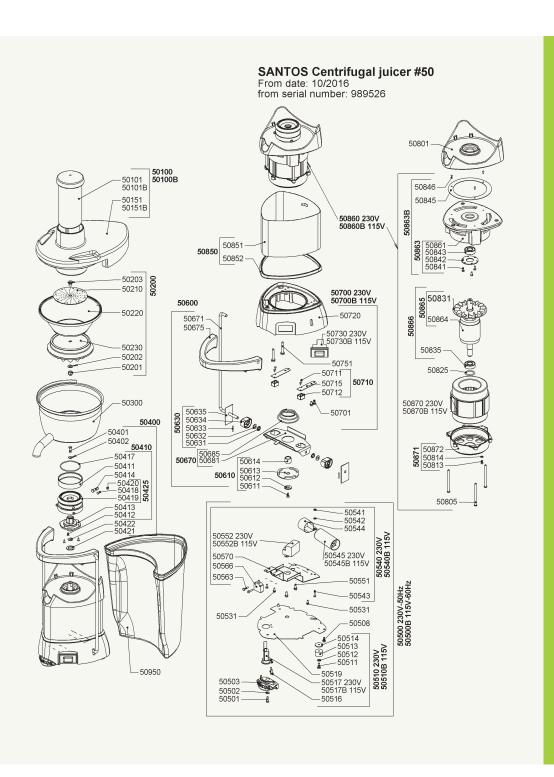



140-150 avenue Roger Salengro BP 80 067 69511 Vaulx-en-Velin Cedex (Lyon) FRANCE Tél: +33 472 37 35 29 Fax: +33 478 26 58 21 Email: santos@santos.fr

www.santos.fr









